


Overview

EZPower DC portable system is a functional off-grid power supply for home and business use, which includes LED light, USB port, cigarette lighter, FM radio in rich interface connection. It's also the efficient energy solution in nowadays.



Main Functions

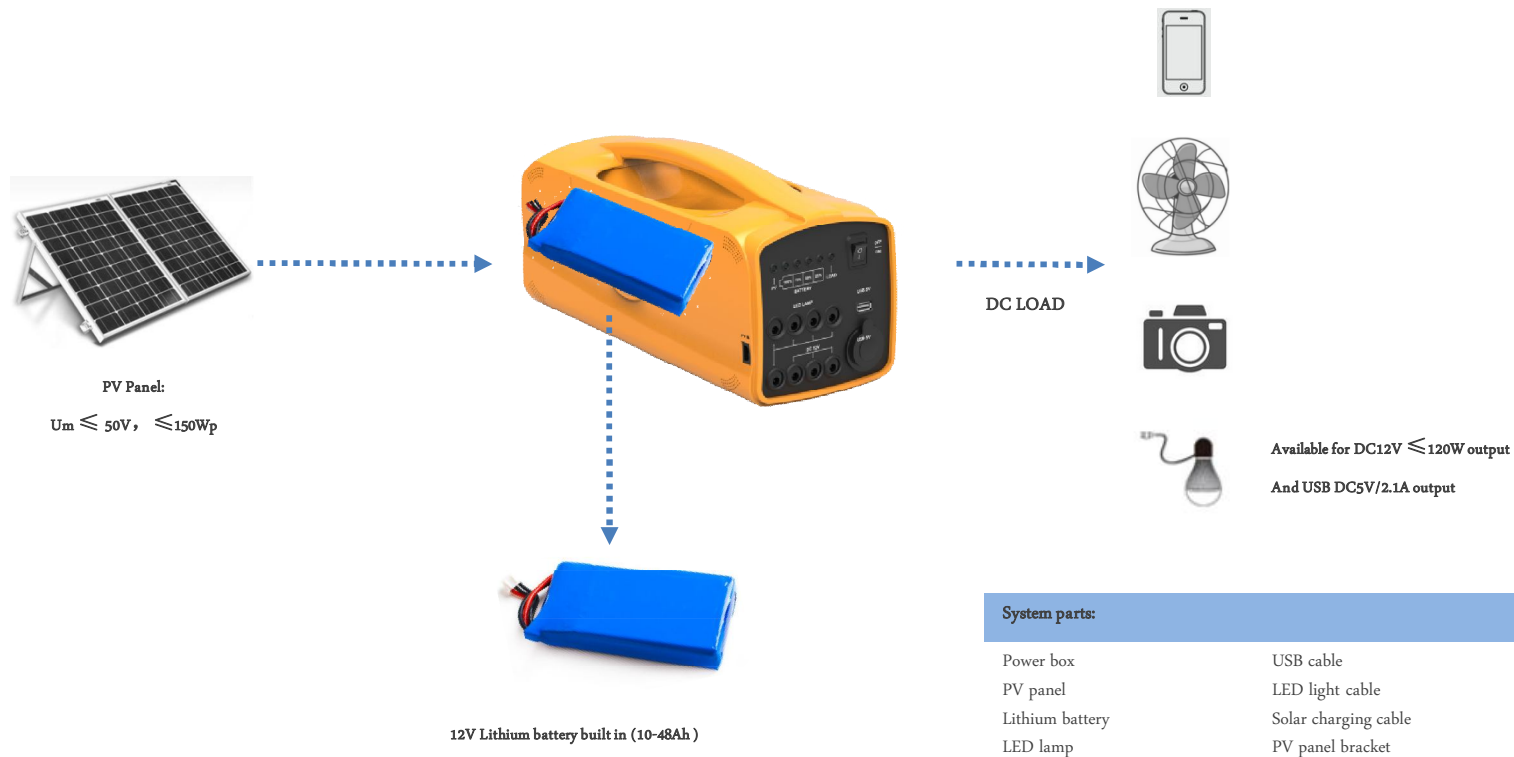

Main Features



Innovative case design, colors selectable



Lithium-ion battery built in (10-48Ah)



Support different power of PV panel (20W-150W)



Diversified output solution (USB and DC socket)



Utility Charging available (Optional on Model **N3S**, **N4S**)



Emergency LED Light Source (Optional on Model **N3**, **N3S**)



FM Video compatible (Optional on Model **N1R**, **N2R**, **N4R**)



Cigarette Lighter (Optional on Model **N1**, **N1R**)



Optional Panels



EZ150S-N1/N1R

8 DC outputs (12V/3A)
1 USB output (5V 2.1A)
1 DC Cigarette lighter (12V/10A)
Rear-mounted radio (Only for N1R)



EZ150S-N2/N2R

8 DC outputs (12V/3A)
2 USB outputs (5V 2.1A)
Rear-mounted radio (Only for N2R)



EZ150S-N3/N3S

4 DC outputs (12V/3A)
2 USB outputs (5V 2.1A)
1 Emergency LED Light
Utility charger (Only for N3S)








EZ150S-N4/N4S/N4R

4 DC outputs (12V/3A)
2 USB outputs (5V 2.1A)
Utility charger (Only for N4S)
Rear-mounted radio (Only for N4R)

Load Consumption

Load consumption

Appliances					
Load Power(watts)	Led lamp(3W)	DC fan(18W)	Mobile phone(5W)	TV(20W)	IPAD(10W)
Work time (hours)	29.6~142	4.9~23.6	17.8~89	4.4~21	8.8~42

Note: the above work time is based on the 10Ah to 48Ah fully charged battery at 25°C (77°F)

Specification

Specification	Solar panel	Battery	Number of DC output	USB	Cigarette output	Radio	Emergency LED light (DC12V3W)	Utility charge	Lamp wire	LED lamp	Charging cable	TV cable
Product												
EZ150S-N1	20W-150W	10-48Ah Li-NiCoMn, 10-26Ah LiFePO4 selectable	8	1	1	—	—	—	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
EZ150S-N1R						√	—	—	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
EZ150S-N2			8	2	—	—	—	—	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
EZ150S-N2R						√	—	—	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
EZ150S-N3			4	2	—	—	√	—	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
EZ150S-N3S						—	√	√	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
EZ150S-N4	20W-60W		4	2	—	—	—	—	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
EZ150S-N4S						—	—	√	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
EZ150S-N4R						√	—	—	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: ☐ indicates selectable, — indicates without function, √ indicates with this function